


FLEXmat

PRODUCT INFORMATION

FIBREGLASS REINFORCEMENT WITH INTEGRATED VEIL FOR PULTRUSION PROCESS

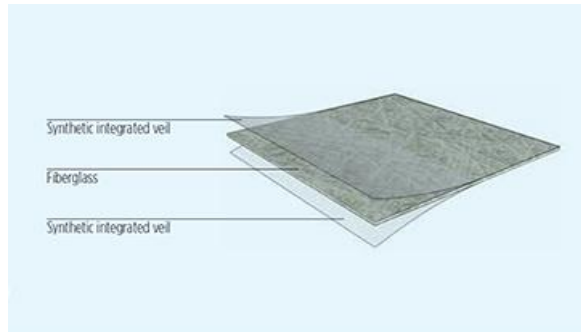

Layers	Description	Weight
Layer 1	Fibreglass	225 - 900 g/m ²
Fixation	Synthetic with veil integrated	< 6%

Dry mechanical properties	Description	Samples size : 75mm*300mm
	MD & CD Elongation at 10daN	< 1.8%
	MD & CD Maximum load	> 12 daN
	MD & CD Elongation at Maximum load	< 3%

Packaging	Diameter	Width	Weight
Roll	55 cm	1270 mm	100 kg
Cardboard Tube	3 or 4 in. (inside)		

Packing

4 Rolls / pallet

36 Paletts / 40' HC Container

Storage

2 layers maximum stacking

Product must be stored in a dry location away from moisture of any kind

Date: 17/03/2016

Approved by Quality Manager: