


# ULTimat

## PRODUCT INFORMATION

FIBERGLASS REINFORCEMENT FOR  
CLOSED MOULD PROCESSES  
(RTM , light RTM)

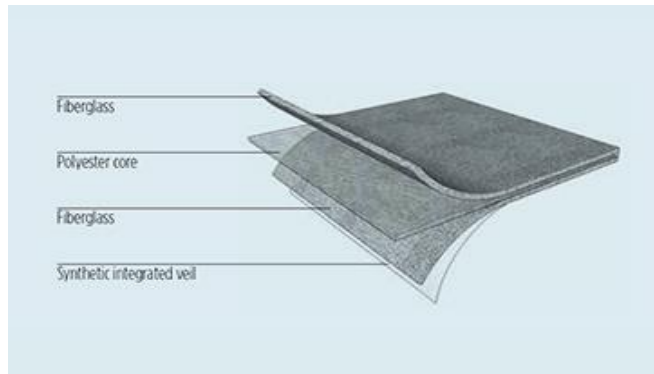

Layers	Description	Weight
Layer 1	Fibreglass	0 - 900 g/m <sup>2</sup>
Layer 2	Polyester Core	110 - 150 - 250 g/m <sup>2</sup>
Layer 3	Fibreglass	0 - 900 g/m <sup>2</sup>
Fixation	Synthetic with veil integrated	≥1%

Packaging	Diameter	Width	Weight
Roll	55 cm	1270 mm	80 - 90 kg
Cardboard Tube	3 in. (inside)		

### Packing

4 Rolls / pallet

36 Pallets /40' HC Container

### Storage

2 layers maximum stacking

Product must be stored in a dry location away from moisture of any kind

Date: 05/02/2013

Approved by Quality Manager: