


PRODUCT INFORMATION

FIBERGLASS REINFORCEMENT FOR CLOSED MOULD PROCESSES (RTM, LIGHT RTM)

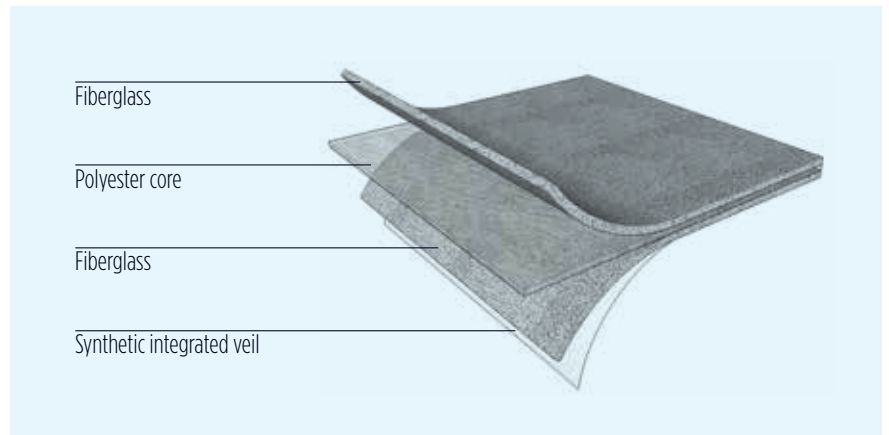

Layers	Description	Weight
Layer 1	Fiberglass	0-900 gr/m ²
Layer 2	Polyester core	110-150-200 gr/m ²
Layer 3	Fiberglass	0-900 gr/m ²
Fixation	Synthetic integrated veil	50 gr/m ²

Packaging	Diameter	Width	Weight
Roll	55 cm	1270 mm	80 kg
Cardboard Tube	3 in (inside)		

Packing

4 Rolls/Pallet

36 Pallets/40' HC Container

Storage

2 layers maximum stacking

Product must be stored in a dry location away from moisture of any kind

Date: 30/08/2012

Approved by Quality Manager: