

FLEXmat®


Fiberglass reinforcement with integrated surfacing veil, 180° melt temperature specifically designed for pultrusion process with higher temperature exposure or slow pulling speed for thick profiles

Technical Data Sheet

#	version
227	2

P300

Description: 300csm

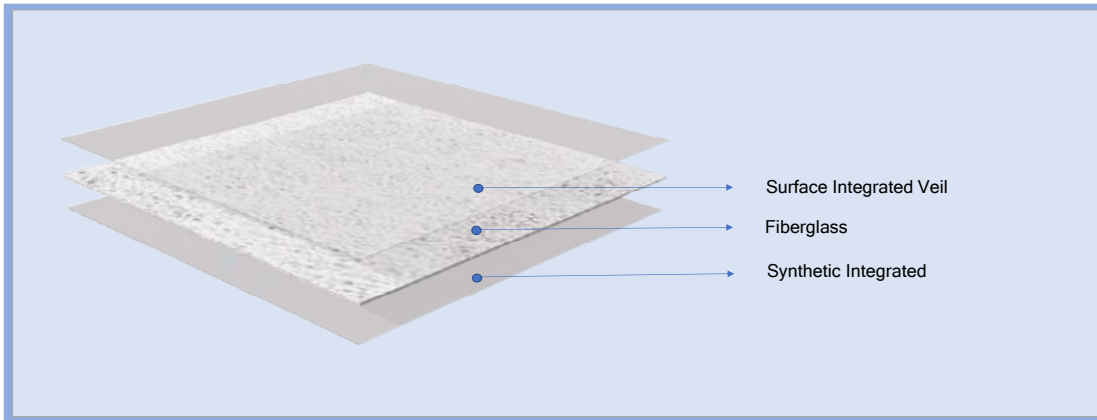

Layers	Description	Weight g/m2
Layer 1	Long fiberglass	300gr/m2
Fixation	Integrated synthetic veil, 180oC melting	<9%
TOTAL WEIGHT		330 gr/m2 (+/-10%)

Packaging	Diameter	Length	Width	Weight
Roll	55 cm.	225mtrs	1270 mm.	94kg
Cardboard Tube	3 in. / 4 in. (inside)			

Packing

4 Rolls / pallett

36 Palletts /40' HC Container

Storage

2 layers maximum stacking

Product must be stored in a dry location away from moisture of any kind

Date: 14/03/2018

Approved by Quality Manager: