


Fiberglass reinforcement with integrated surfacing veil, 180° melt temperature specifically designed for pultrusion process with higher temperature exposure or slow pulling speed for thick profiles

## Technical Data Sheet

#	version
275	1

### amplify P450

Description: 450csm/amplify30csm

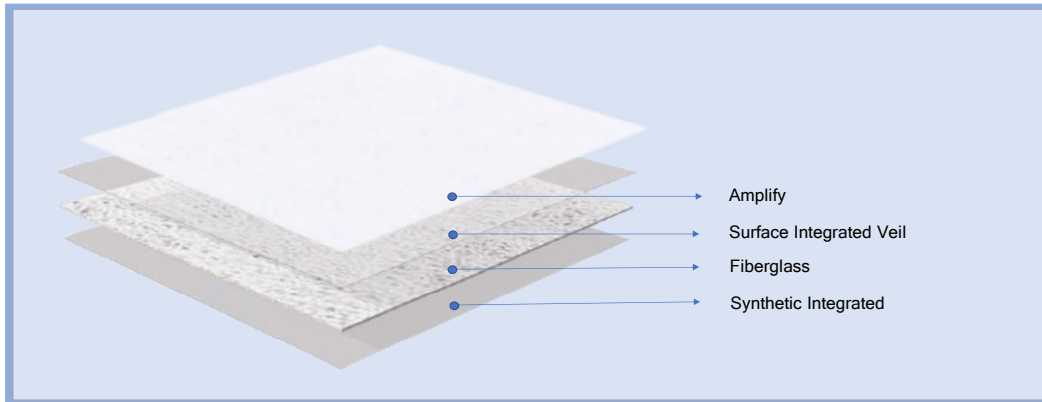

Layers	Description	Weight g/m2
Layer 1	Long fibreglass	450gr/m2
ASPECT layer	Carded and Thermobonded veil	30gr/m2
Fixation	Integrated synthetic veil, 180oC melting	<6%
<b>TOTAL WEIGHT</b>		<b>510 gr/m2 (+/-10%)</b>

Packaging	Diameter	Length	Width	Weight
Roll	55 cm.	160mtrs	1200 mm.	98kg
Cardboard Tube	3 in. / 4 in. (inside)			

#### Packing

4 Rolls / pallett

36 Palletts /40' HC Container

#### Storage

2 layers maximum stacking

Product must be stored in a dry location away from moisture of any kind

Date: 12/04/2022

Approved by Quality Manager: