


ULTimat combi

FIBERGLASS REINFORCEMENT WITH ADDED MULTIAXIAL FABRIC FOR APPLICATIONS DEMANDING HIGHER MECHANICAL PROPERTIES

Technical Data Sheet

GENERIC

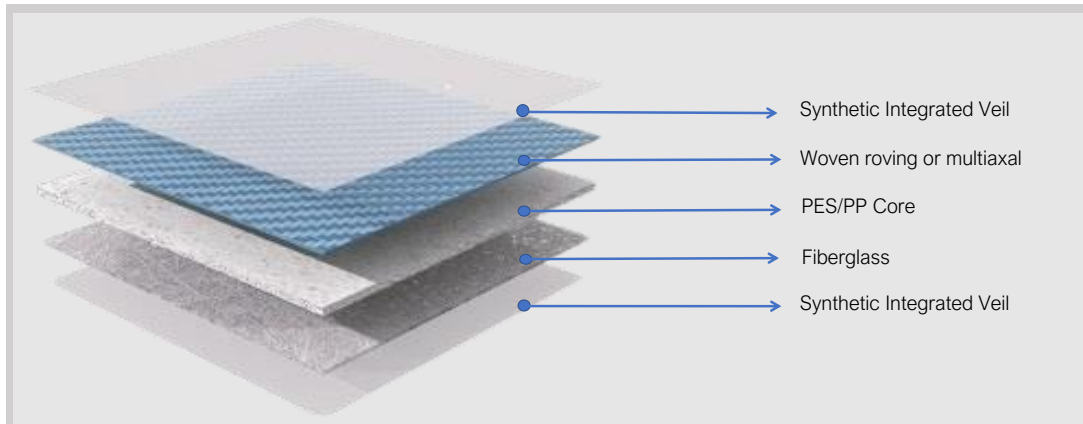

Layers	Description	Weight g/m2
Layer 1	Fibreglass	0 <w <900
Layer 2	Woven roving or multiaxial	400 <w <900
Layer 3	Polyester/PP Core	110-150-180-200-250
Layer 4	Fibreglass	0 <w <900
Fixation	Synthetic with veil integrated	

Packaging	Diameter	Length	Width	Weight
Roll	55 cm.		1250 mm.	50-90 kgs.
Cardboard Tube	3 in. (inside)			

Packing

4 Rolls / pallett

36 Palletts /40' HC Container

Storage

2 layers maximum stacking

Product must be stored in a dry location away from moisture of any kind

Date: 05/02/2013

Approved by Quality Manager: