


ULTimat CSM

FIBERGLASS REINFORCEMENT FOR USE IN HAND LAMINATION PROCESS.
COMPATIBLE WITH STYRENE FREE RESINS SYSTEMS

Technical Data Sheet

GENERIC

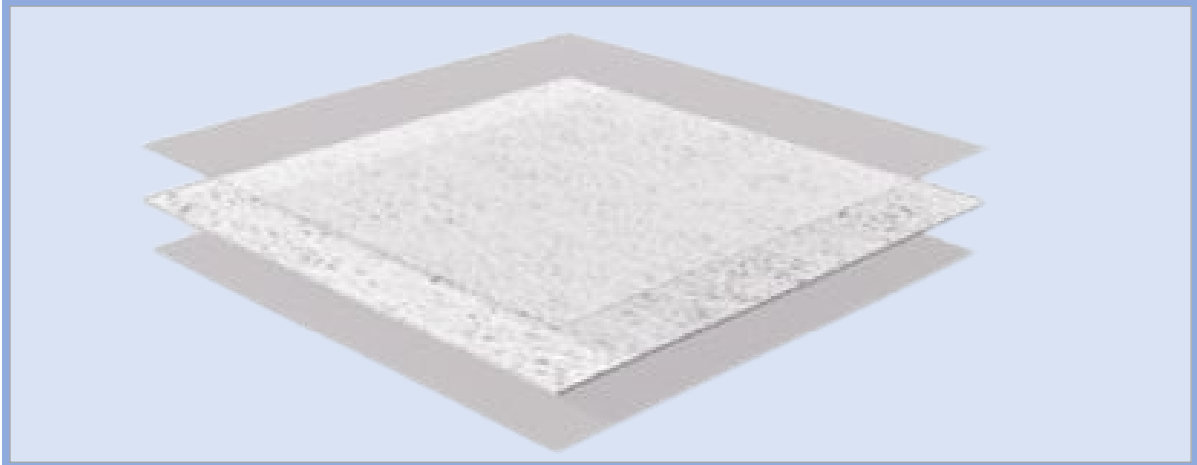

Layers	Description	Weight g/m2
Layer 1	Long fibreglass	225 <w <900
Fixation	Synthetic with veil integrated	

Packaging	Diameter	Length	Width	Weight
Roll	40 cm.		1250 mm.	50kg.
Cardboard Tube	3 in. (inside)			

Packing

6 Rolls / pallett

36 Palletts /40' HC Container

Storage

2 layers maximum stacking

Product must be stored in a dry location away from moisture of any kind

Date: 05/02/2013

Approved by Quality Manager: