

ULTimat combi

FIBERGLASS REINFORCEMENT WITH ADDED MULTIAXIAL FABRIC FOR APPLICATIONS DEMANDING HIGHER MECHANICAL PROPERTIES

Technical Data Sheet

#


version

246

3

1N300PP18B

Description: 800csm/180PP/300csm

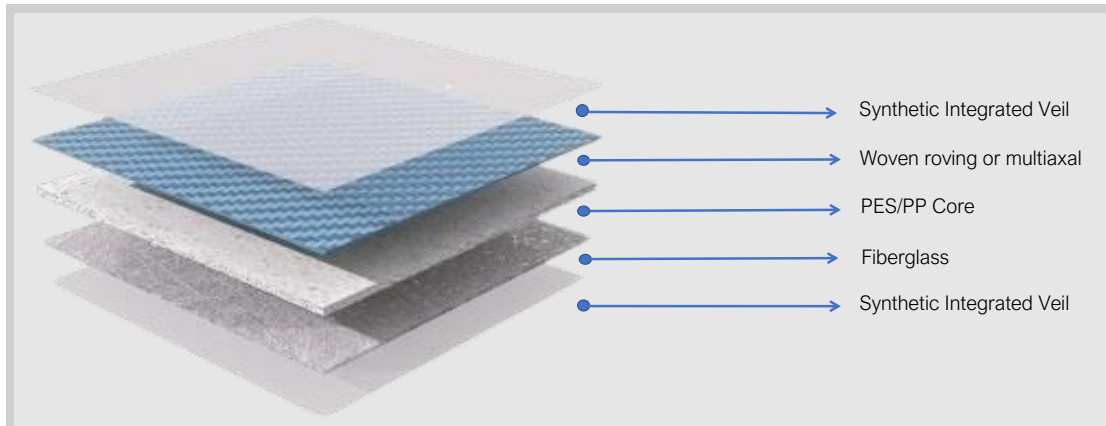

Layers	Description	Weight g/m2
Layer 1	Multiaxial	800gr/m2
Layer 2	Polypropylene Core	180gr/m2
Layer 3	Fibreglass	300gr/m2
Fixation	Synthetic with veil integrated	<3%
TOTAL WEIGHT		1310 gr/m2 (+/-10%)

Packaging	Diameter	Length	Width	Weight
Roll	40 cm.	25-50mtrs	1250 mm.	41-82 kgs.
Cardboard Tube	3 in. (inside)			

Packing

9 Rolls / pallett

36 Palletts /40' HC Container

Storage

2 layers maximum stacking

Product must be stored in a dry location away from moisture of any kind

Date: 25/02/2021

Approved by Quality Manager: