


ULTImat CSM

FIBERGLASS REINFORCEMENT FOR USE IN HAND LAMINATION PROCESS.
COMPATIBLE WITH STYRENE FREE RESINS SYSTEMS

Technical Data Sheet	#	version
	219	4

450

Description: 450csm

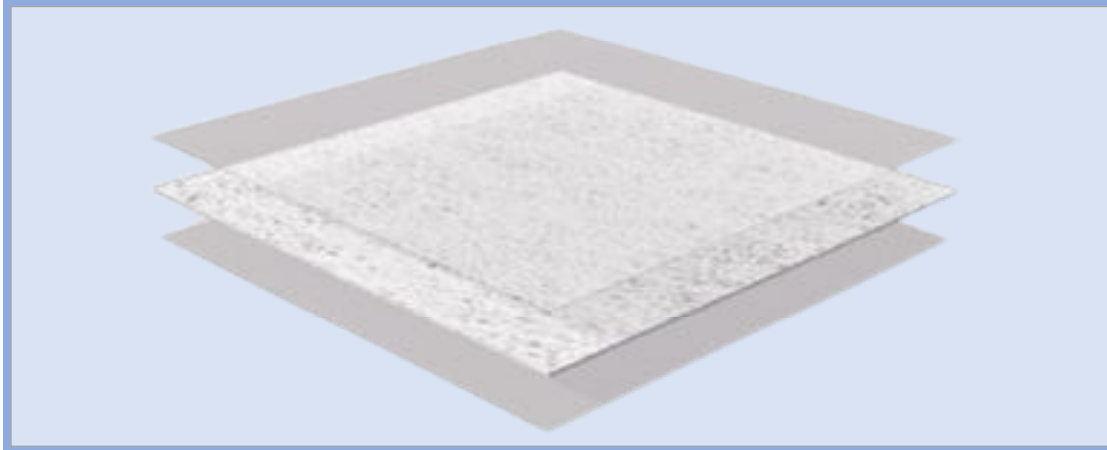

Layers	Description	Weight g/m2
Layer 1	Long fibreglass	450gr/m2
Fixation	Synthetic with veil integrated	<7%
TOTAL WEIGHT		480 gr/m2 (+/-10%)

Packaging	Diameter	Length	Width	Weight
Roll	40 cm.	90mtrs	1250 mm.	54kg.
Cardboard Tube	3 in. (inside)			

Packing

6 Rolls / pallett

36 Palletts /40' HC Container

Storage

2 layers maximum stacking

Product must be stored in a dry location away from moisture of any kind

Date: 06/12/2017

Approved by Quality Manager: