

ULTimat FR


FIBERGLASS REINFORCEMENT FOR CLOSED
MOULD PROCESSES (RTM , light RTM)

Technical Data Sheet

| # | version |
|-----|---------|
| 255 | 1 |

2N450HS25

Description: 450csm/250PE-FR/450csm

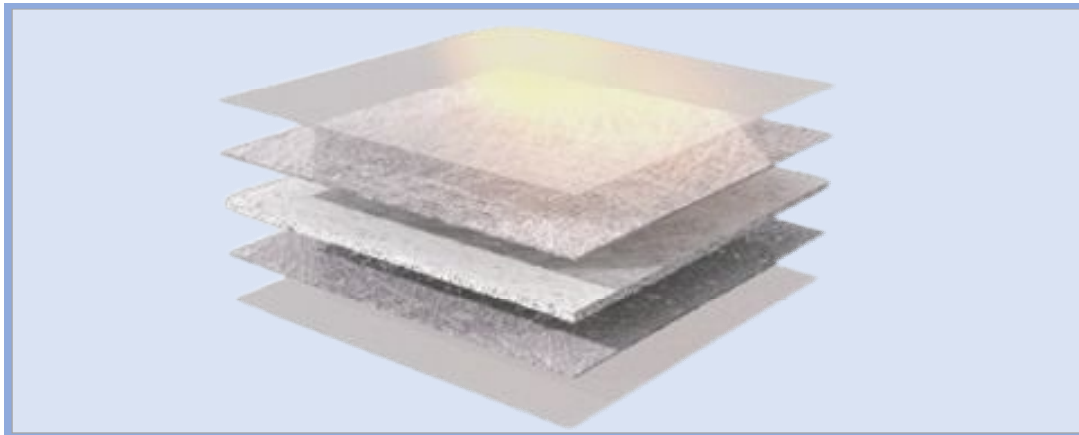

| Layers | Description | Weight |
|----------|--------------------------------|----------|
| Layer 1 | Fibreglass | 450gr/m2 |
| Layer 2 | Polyester FR Structural Core | 250gr/m2 |
| Layer 3 | Fibreglass | 450gr/m2 |
| Fixation | Synthetic with veil integrated | <3% |

| Packaging | Diameter | Length | Width | Weight |
|----------------|----------------|--------|----------|--------|
| Roll | 55 cm. | 55mtrs | 1270 mm. | 82kgs. |
| Cardboard Tube | 3 in. (inside) | | | |

Packing

4 Rolls / pallett

36 Palletts /40' HC Container

Storage

2 layers maximum stacking

Product must be stored in a dry location away from moisture of any kind

Date: 11/07/2019

Approved by Quality Manager: