


# ULTimat HF

FIBERGLASS REINFORCEMENT FOR CLOSED MOULD PROCESSES (RTM , light RTM)

<b>Technical Data Sheet</b>	<b>#</b>	<b>version</b>
	160	1

**2N450HS25**

**Description: 450csm/250PE/450csm**

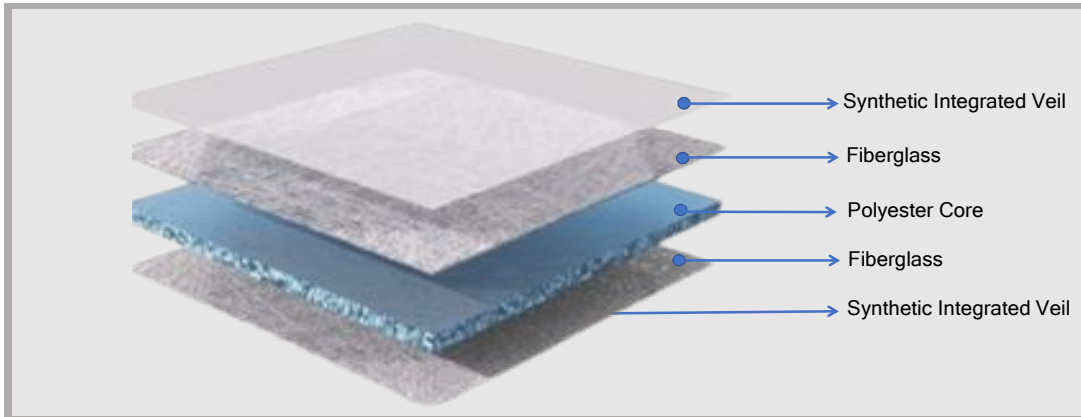

Layers	Description	Weight
Layer 1	Fibreglass	450gr/m <sup>2</sup>
Layer 2	Polyester Structural Core	250gr/m <sup>2</sup>
Layer 3	Fibreglass	450gr/m <sup>2</sup>
Fixation	Synthetic with veil integrated	<3%
<b>TOTAL WEIGHT</b>		<b>1180 gr/m<sup>2</sup> (+/-10%)</b>

Packaging	Diameter	Length	Width	Weight
<b>Roll</b>	55 cm.	55mtrs	1270 mm.	82kg
<b>Cardboard Tube</b>	3 in. (inside)			

#### Packing

4 Rolls / pallett

36 Palletts /40' HC Container

#### Storage

2 layers maximum stacking

Product must be stored in a dry location away from moisture of any kind

Date: 12/12/2015

Approved by Quality Manager:



#### ILIUM WLL

PO Box 26385, Building 1400, Road 1518, Block 115  
Hidd, Bahrain International Investment Park  
Kingdom of Bahrain

T +973 17165200

F +973 17466708

[info@iliumcomposites.com](mailto:info@iliumcomposites.com)

[www.iliumcomposites.com](http://www.iliumcomposites.com)