


ULTimat PP

FIBERGLASS REINFORCEMENT FOR CLOSED MOULD PROCESSES (RTM , light RTM)

Technical Data Sheet	#	version
	193	1

2N600PP18

Description: 600csm/180PP/200csm

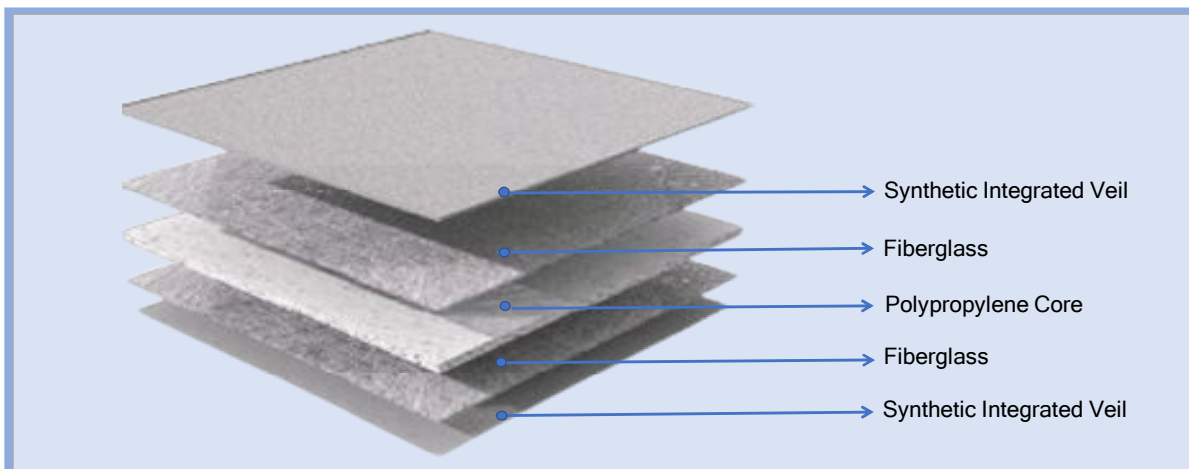

Layers	Description	Weight
Layer 1	Fibreglass	600gr/m2
Layer 2	Polypropylene Core	180gr/m2
Layer 3	Fibreglass	600gr/m2
Fixation	Synthetic with veil integrated	<3%
TOTAL WEIGHT		1410 gr/m2 (+/-10%)

Packaging	Diameter	Length	Width	Weight
Roll	55 cm.	50mtrs	1270 mm.	90 kgs.
Cardboard Tube	3 in. (inside)			

Packing

4 Rolls / pallett

36 Palletts /40' HC Container

Storage

2 layers maximum stacking

Product must be stored in a dry location away from moisture of any kind

Date: 04/07/2017

Approved by Quality Manager: