

ULTimat invisiflo®


FIBERGLASS REINFORCEMENT FOR CLOSED MOLD AND OPTICALLY TRANSLUCENT APPLICATIONS

Technical Data Sheet

#	version
158	1

1200

Description: 1200csm

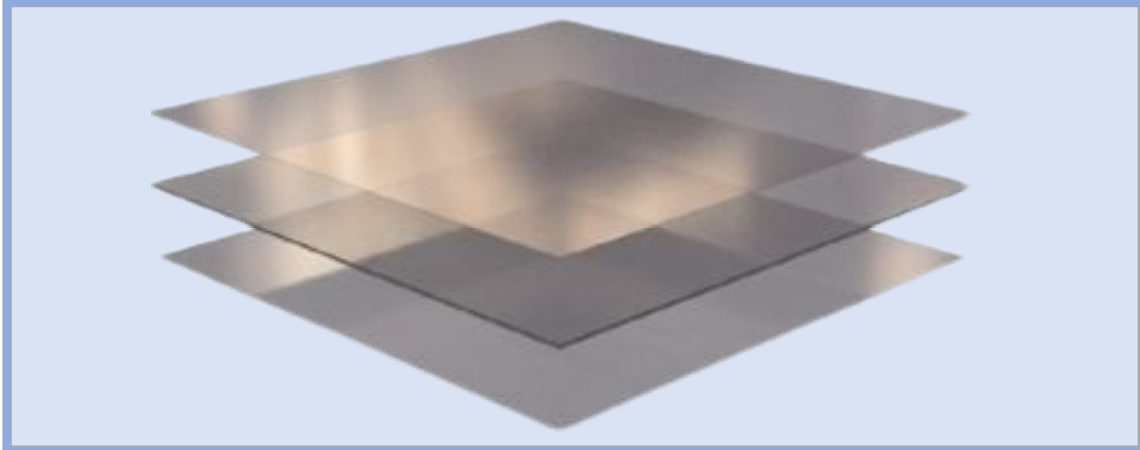

Layers	Description	Weight
Layer 1	Long fibreglass	1200gr/m2
Fixation	Synthetic with veil integrated	<1%
TOTAL WEIGHT		1210 gr/m2 (+/-10%)

Packaging	Diameter	Length	Width	Weight
Roll	55 cm.	55mtrs	1250 mm.	85kg.
Cardboard Tube	3 in. (inside)			

Packing

4 Rolls / pallett

36 Palletts /40' HC Container

Storage

2 layers maximum stacking

Product must be stored in a dry location away from moisture of any kind

Date: 12/11/2015

Approved by Quality Manager: