

ULTimat invisiflo®


FIBERGLASS REINFORCEMENT FOR CLOSED MOLD AND OPTICALLY TRANSLUCENT APPLICATIONS

Technical Data Sheet

#	version
216	1

600

Description: 600csm

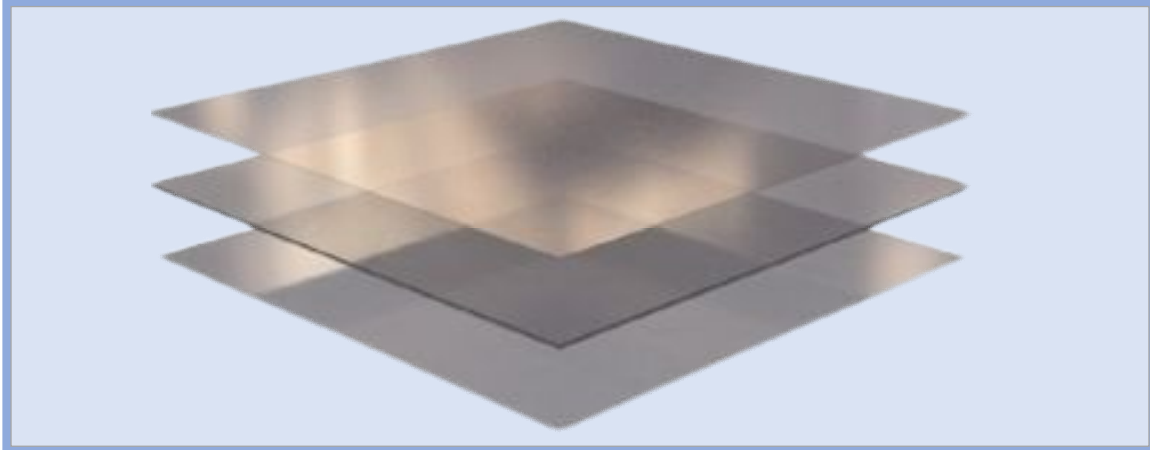

Layers	Description	Weight
Layer 1	Long fibreglass	600gr/m2
Fixation	Synthetic with veil integrated	<1%
TOTAL WEIGHT		610 gr/m2 (+/-10%)

Packaging	Diameter	Length	Width	Weight
Roll	55 cm.	105mtrs	1250 mm.	81kg.
Cardboard Tube	3 in. (inside)			

Packing

4 Rolls / pallett

36 Palletts /40' HC Container

Storage

2 layers maximum stacking

Product must be stored in a dry location away from moisture of any kind

Date: 15/10/2017

Approved by Quality Manager: