

# ULTimat invisiflo®


FIBERGLASS REINFORCEMENT FOR CLOSED MOLD AND OPTICALLY TRANSLUCENT APPLICATIONS

## Technical Data Sheet

#	version
243	1

900

Description: 900csm

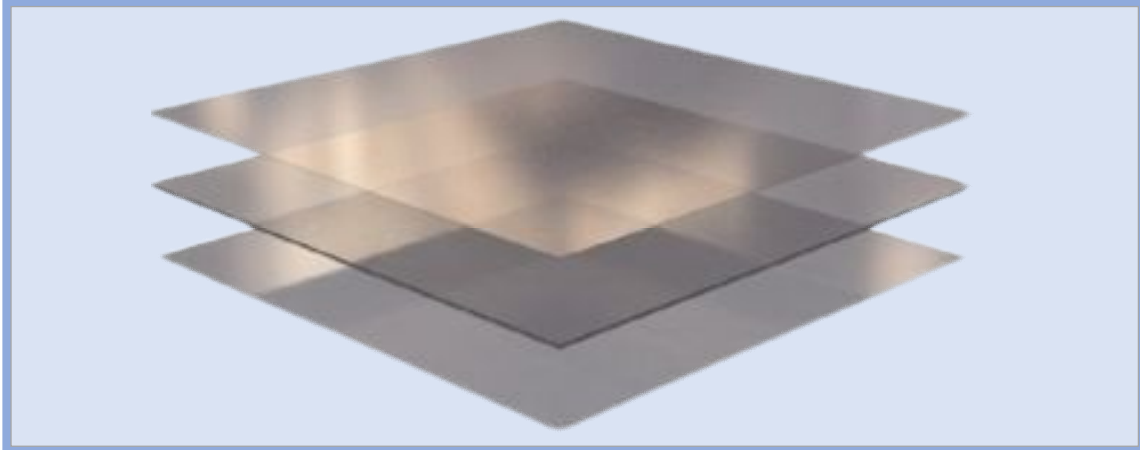

Layers	Description	Weight
Layer 1	Long fibreglass	900gr/m2
Fixation	Synthetic with veil integrated	<1%
<b>TOTAL WEIGHT</b>		<b>910 gr/m2 (+/-10%)</b>

Packaging	Diameter	Length	Width	Weight
Roll	55 cm.	72mtrs	1250 mm.	83kg.
Cardboard Tube	3 in. (inside)			

### Packing

4 Rolls / pallett

36 Palletts /40' HC Container

### Storage

2 layers maximum stacking

Product must be stored in a dry location away from moisture of any kind

Date: 15/10/2017

Approved by Quality Manager: