


ULTImat preform

PREFORMABLE FIBERGLASS REINFORCEMENT FOR ALL CLOSED MOLD PROCESSES SUCH AS light RTM & SILICONE BAG MOULDING
Designed without chemical binder, preformed with low cost forming and heating equipment

Technical Data Sheet	#	version
	159	1

2N450PS15

Description: 450csm/150PE preform/450csn

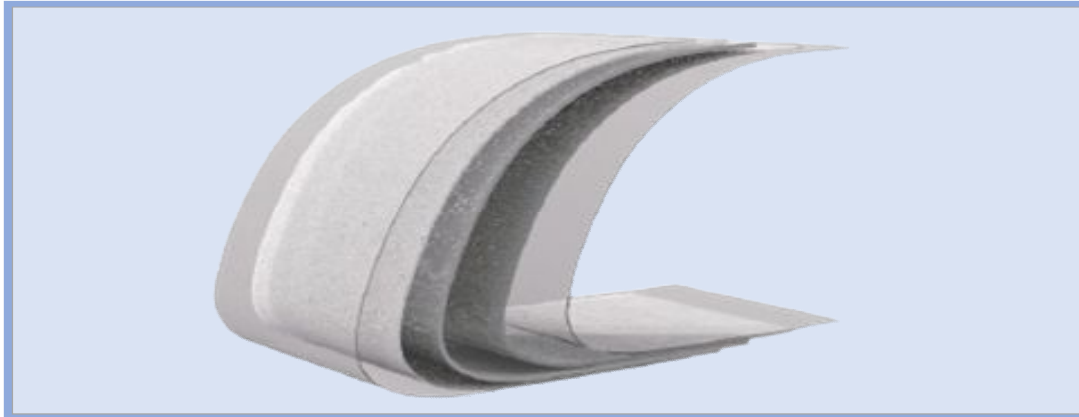

Layers	Description	Weight
Layer 1	Fibreglass	450gr/m2
Layer 2	Polyester core (preformable)	150gr/m2
Layer 3	Fibreglass	450gr/m2
Fixation	Synthetic with veil integrated	<3%
TOTAL WEIGHT		1080 gr/m2 (+/-10%)

Packaging	Diameter	Length	Width	Weight
Roll	55 cm.	60mtrs	1270 mm.	82 kgs.
Cardboard Tube	3 in. (inside)			

Packing

4 Rolls / pallett

36 Palletts /40' HC Container

Storage

2 layers maximum stacking

Product must be stored in a dry location away from moisture of any kind

Date: 12/11/2015

Approved by Quality Manager: