


FLEXmat®

Fiberglass reinforcement with integrated surfacing veil, 180° melt temperature specifically designed for pultrusion process with higher temperature exposure or slow pulling speed for thick profiles

Technical Data Sheet

GENERIC

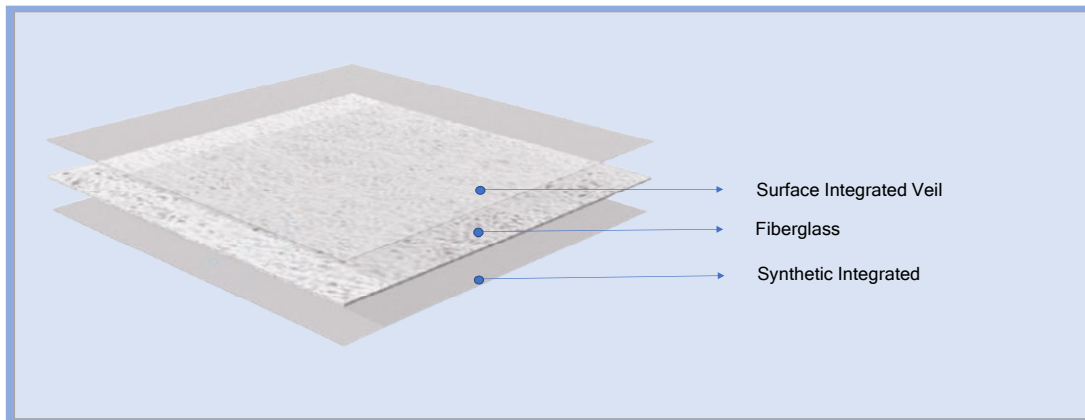

Layers	Description	Weight g/m2
Layer 1	Long fiberglass	225 <w <900
Fixation	Integrated synthetic veil, 180oC melting	

Packaging	Diameter	Length	Width	Weight
Roll	55 cm.		1270 mm.	100kg
Cardboard Tube	3 in. / 4 in. (inside)			

Packing

4 Rolls / pallett

36 Palletts /40' HC Container

Storage

2 layers maximum stacking

Product must be stored in a dry location away from moisture of any kind

Date: 05/02/2013

Approved by Quality Manager: